

企业简介 »»

QIYEJIANJIE

泉州海泰化工有限公司成立于2007年，是一家集专业研发、生产和销售化学发泡剂、发泡母粒、防缩水母粒及PE发泡膜的科技型企业。公司为提升产品竞争力不断吸收国内外优秀发泡剂生产应用技术,引进国外先进技术和设备。不仅如此,公司积极与国内科研机构及高等院校合作,不断吸收专业知识以提高产品性能。所研发生产的各系列产品不仅拥有市场竞争力而且性能优异,技术水平国内外领先。

海泰秉承“团结、创新、合作、共赢”的理念,不断创新,以雄厚的技术力量,现代化的生产设备,一流的管理人员和完善的服务体系与广大客户共发展。

Quanzhou HAITAI Chemical Co., LTD was established in 2007. It is a technology enterprise which professionally researches ,produces and sales blowing agent, master batch and PE foam film. HAITAI strives to upgrade products by absorbing new production application technology and bringing in advanced equipment from domestic and overseas. Besides, HAITAI connects closely with domestic research institutions and universities for getting professional knowledge to upgrade our products property. After long time' s market testing ,our products proved to has excellent performance with competitive price.



Adhering to the concept of "unity, innovation, cooperation and win-win"idea, HAITAI constantly innovate to develop together with customers with strong technical force, modern production equipment, first-class management and perfect service system.



主要产品 »»

M MAIN PRODUCTS

- ADC 黄发泡剂
ADC YELLOW BLOWING AGENT
- 环保白发泡剂
ECO-FRIENDLY WHITE BLOWING AGENT
- 粗孔发泡剂
MACROPOROUS BLOWING AGENT
- AC母粒
AC MASTER BATCH
- 防缩水母粒
ANTI-SHRINKAGE MASTER BATCH
- PE发泡膜
PE FOAM FILM

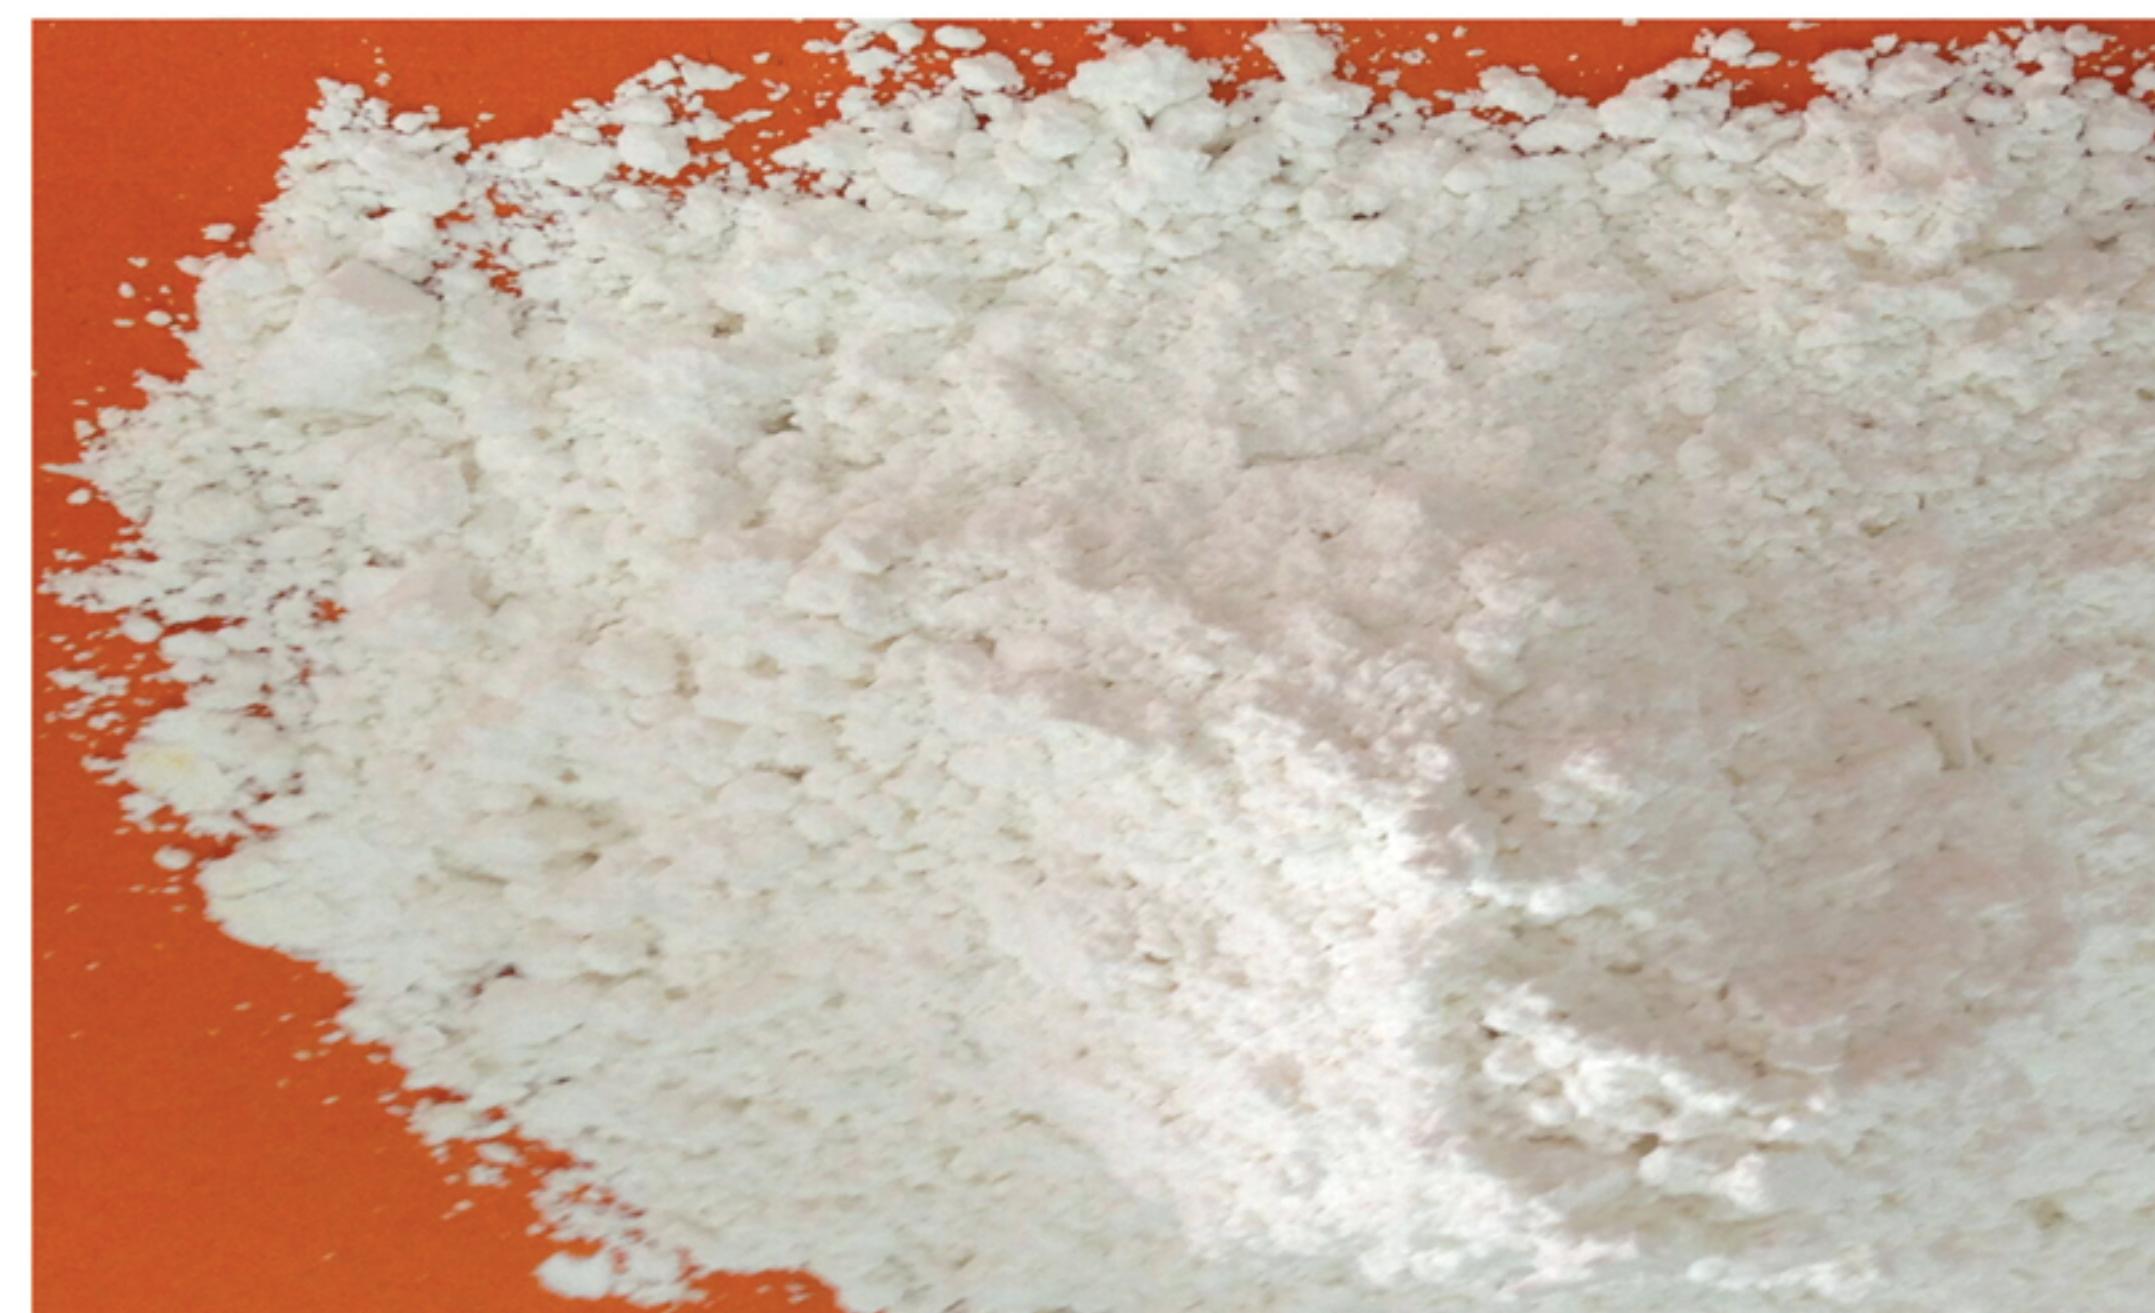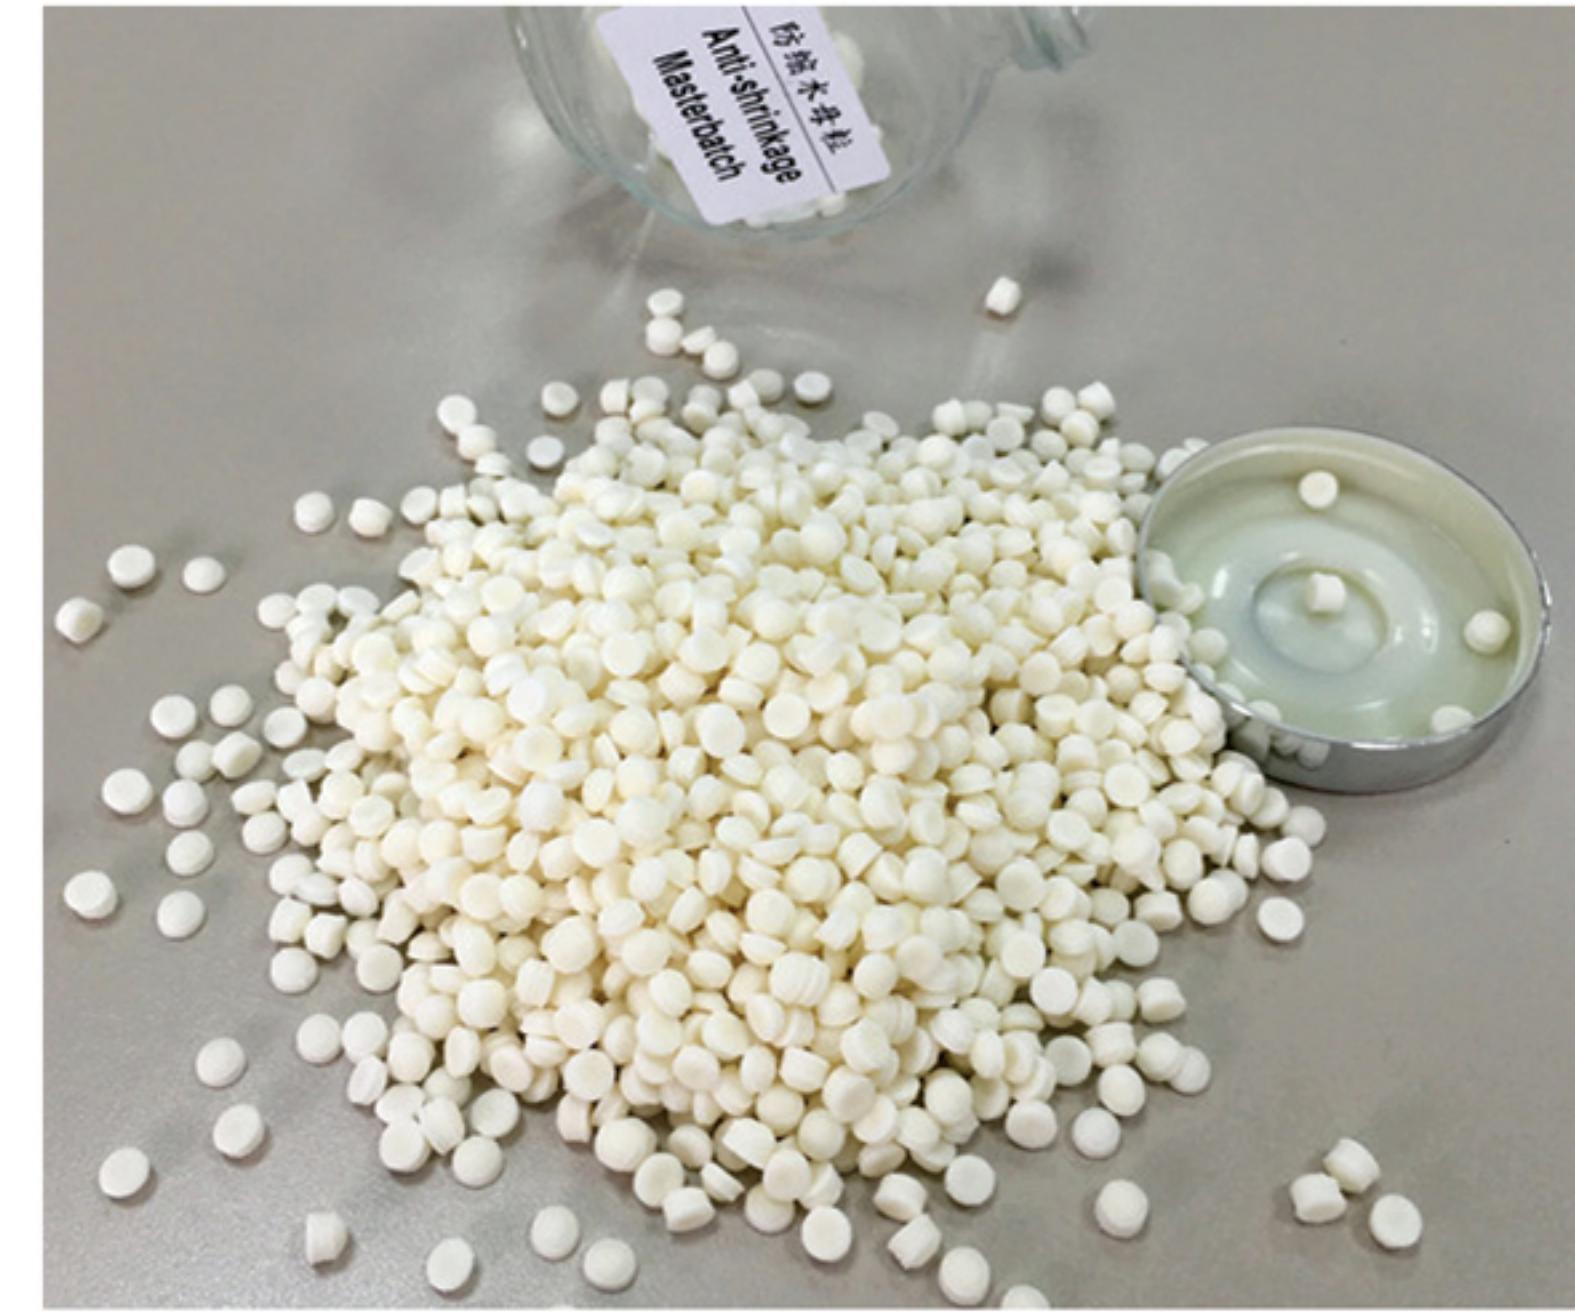


海泰ADC黄发泡剂系列 HAITAI ADC Yellow Blowing Agent Series

类型 Category	型号 Item No.	粒径(μm) Particle Size	发气量(ml/g) Gas Volume	分解温度(℃) Decomposition Temperature	应用说明 Application
高温发泡剂 High-Temperature blowing agent	AC1000	11-13	≥220	205±5	各种塑料、橡胶发泡 Various foaming plastic and rubber
	AC3000	6-8	≥220	205±5	
	AC5000	4-6	≥220	205±5	
	AC7000	3-5	≥220	205±5	
中温发泡剂 Medium-Temperature blowing agent	HT-165	6-8	165±5	180±5	各种塑料、橡胶发泡及EVA鞋底的热压大小模发泡 Various foaming plastic& rubber and hot-pressing molding of EVA shoes in large or small mold
	HT-150	6-8	150±5	160±5	
低温发泡剂 low-Temperature blowing agent	ACP-W	14-17	140±5	135±5	各种塑料、橡胶发泡及EVA鞋底的热压大小模发泡 Various foaming plastic& rubber and hot-pressing molding of EVA shoes in large or small mold
	ACP-L	14-17	130±5	130±3	
EVA射出专用发泡剂 Special blowing agent for Injection EVA	AC6000ZW(无味)	5-7	190±5	190±5	EVA射出发泡工艺 EVA injection technology of EVA
	AC6000H	5-7	190±5	180±5	
	AC3000T	3-5	175±5	190±5	
PVC吹气专用发泡剂 Special blowing agent for blowing PVC	AC2000F	7-10	≥220	205±5	PVC吹气拖鞋和鞋底 PVC blowing slippers and soles
	AC4000F	5-8	≥230	205±5	
	AC7000F	3-5	≥230	205±5	
人造革专用发泡剂 Special blowing agent for artificial leather	AC3000F	6-8	≥230	205±5	PVC人造革及半PU人造革 PVC artificial leather and half-PU artificial leather
	AC7000F	3-5	≥230	205±5	
无味发泡剂 odorless blowing agent	AC1000W	10-12	≥220	205±5	无氨味的AC发泡剂。 用于拼图、切片等。 No ammonia odor AC blowing agent for puzzle game pad, yogo mat and so on
	AC1000PW	10-12	≥220	205±5	
热平衡发泡剂 Endotherm-exotherm balanced blowing agent	HT-Z	8-10	225±5	170-185	PVC、TPR、PS挤出发泡工艺 注射发泡工艺 模压发泡 Extruding foaming , injection molding and mould foaming of PVC, TPR and PS.
	HT-S	10-12	195±5	170-185	
	HT-X	10-12	215±5	165-180	
XPE发泡剂 XPE blowing agent	HT-XPE	20-22	190±5	190-194	XPE发泡 Xpe foaming agent

海泰环保白色发泡剂系列 HAITAI ECO-Friendly White Blowing Agent Series

型号 Item No.	粒径(μm) Particle Size	发气量(ml/g) Gas Volume	分解温度(℃) Decomposition Temperature	应用说明 Application
HT-T	6-10	≥110	140-160	TPR注塑、木塑等 TPR injection, WPC and so on
HT-P	6-10	≥110	160-170	PVC硬质材料、PS、TPR等 PVC rigid material, PS , TPR and so on
HT-C(吹气) HT-C(blowing)	6-10	≥115	170-180	超轻TPR、吹气拖鞋、人造革 Untralight TPR, blowing slippers, artificial leather
HT-R	6-10	≥120	180-190	PVC人造革 PVC artificial leather
HT-RZ	6-10	≥120	190-200	PVC人造革 PVC artificial leather
无甲酰胺发泡剂 Non-formamide blowing agent	4-8	≥130	150	不含甲酰胺 用于各种塑料、橡胶发泡 Non-formamide used for various plastic and rubber foaming
防缩水粉末 Anti-shrinkage powder	4-8	≥80	120-160	各种塑料注塑产品 Various plastic injection products

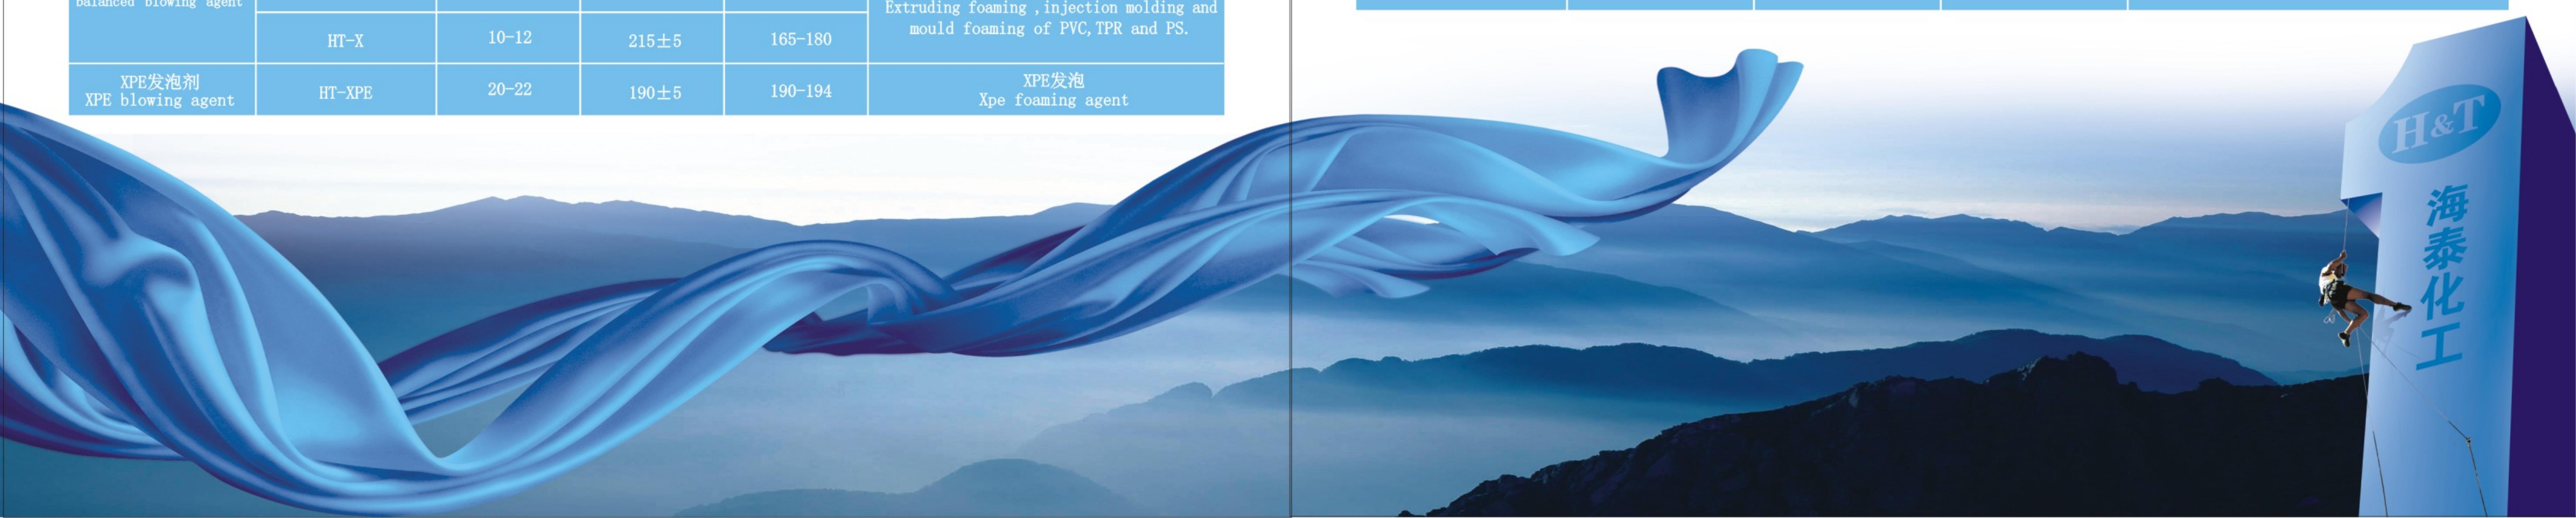

海泰粗孔发泡剂系列

HAITAI Macroporous Blowing Agent Series

型号 Item No.	粒径 (μm) Particle Size	发气量(ml/g) Gas Volume	分解温度(℃) Decomposition Temperature	应用说明 Application
HT-C	10-17	130	130±5	EVA、橡胶等粗孔发泡 EVA, rubber and other macroporous foaming
HT-ZC	10-17	125	125±5	

海泰母粒系列

HAITAI Master Batch Series

型号 Item No.	粒径 (μm) Particle Size	发气量(ml/g) Gas Volume	分解温度(℃) Decomposition Temperature	应用说明 Application
AC母粒 AC master batch	3-5	160	200	订制 Customized is acceptable
环保防缩水母粒 Eco-friendly anti-Shrinkage master batch	4-10	60	140-170	用于各种塑料注塑产品。 消除缩水痕，减小内应力。 Used in various plastic injection products to avoid scratches and shrink marks and reduce internal stress

海泰PE发泡膜系列

HAITAI PE Foam Film Series

名称 Name	材料 Material	颜色 Color	厚度 (mm) Thickness	密度(kg/m³) Density	应用说明 Application
珍珠纸 Pearl Paper	PE	白 White	0.08~0.5	400~700	无尘导光板、玻璃基板隔热、餐垫、制袋 Dust-free light guide plate, glass substrate heat insulation, meal pad, bag making
PE发泡膜 PE foam file	PE	黑 Black	0.08~0.5	400~700	胶带、基材 Tape, base material

A 应用案例 »»

发泡剂广泛应用于各种塑料和橡胶制品中，达到减重，隔音，隔热，缓冲以及降低成本等效果。

Blowing agent is widely used in various plastic and rubber products. It helps to reduce weight, offer sound and thermal insulation, reach cushioning effect and save cost.

